


Product Datasheet

19 Wall Recessed & Inground>Ground Surface Mounted Range Die cast

69058A/G/W

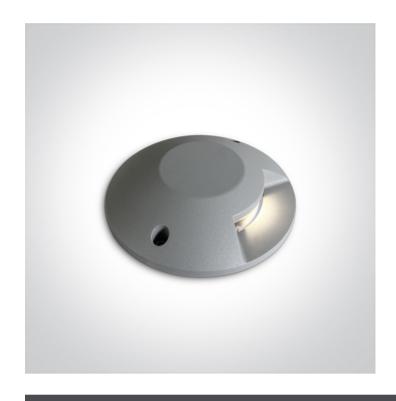

6W COB LED Surface ground, IP67 for path illumination.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Gallery



Physical Specification

Item Group	19 Wall Recessed & Inground
Family	Ground Surface Mounted Range Die cast
Order Code	69058A/G/W
Colour	Grey
Material	Die Cast
Shape	Circular
Height	42mm

Diameter	200mm
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	10
Electrical Characteristics	
Gear	Built In
Fitting + Driver	
Fitting + Driver Input Voltage	220-240V
	220-240V Yes
Input Voltage	
Input Voltage 50 Hz	Yes
Input Voltage 50 Hz 60 Hz	Yes

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	6W
IP Rating	IP67
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	10V
Safety Class	
Power(Watts)	5W
IP Rating	IP67
Light Source	LED built in
LED Type	COB

LED Brand	Cree
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	3-6W
Power Factor	0,9
Constant Current	Yes
500mA	6-12V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise
Illumination Data	
Illumination Data Colour Temperature	3000K
	3000K 300lm
Colour Temperature	
Colour Temperature Lumen Output	300lm
Colour Temperature Lumen Output Light Efficiency	300lm 50lm/W
Colour Temperature Lumen Output Light Efficiency CRI	300lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI	300lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI	300lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram	300lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram	300lm 50lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram Packing Info Box Weight	300lm 50lm/W 80 0.916kg
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram Packing Info Box Weight Pcs/Carton	300lm 50lm/W 80 0.916kg

Warranty 2 years

